



Coextruded Plastic Technologies, Inc.

GO-GREEN

Product

3706 Enterprise Dr.
Janesville, WI 53545

www.gogreenpackaging.com

Phone: (608) 314-2020
Fax: (608) 314-2021

RIGID PP TRAYS:

FP000 series

MATERIAL:

- STRUCTURE *High or Low Barrier w/ or w/o PE Seal layer*
- STOCK COLORS *BLACK or WHITE (custom colors available)*

TRAY DIMENSIONS:


- LENGTH *12.63 inches (321 mm)*
- WIDTH *10.4 inches (264 mm)*
- DEPTHS *FP200 - 2.0" (51 mm), FP250 - 2.5" (63.5mm), FP300 - 3.0" (76.2 mm)*
- COMPARTMENTS *1 and 3*

GAS PERMEABILITY:

- OXYGEN TRANSMISSION RATE @ 73° F AND 0% RH *High Barrier - 0.1cc to 1cc / tray / 24 hours*
Low Barrier - 1cc to 2cc / tray / 24 hours**
- WATER VAPOR TRANSMISSION RATE @ 100° F AND 90% RH *<0.1 g / tray / 24 hours*

TEMPERATURE:

- TEMPERATURE RANGE *-20° to 257° F (-29° to 125° C)*

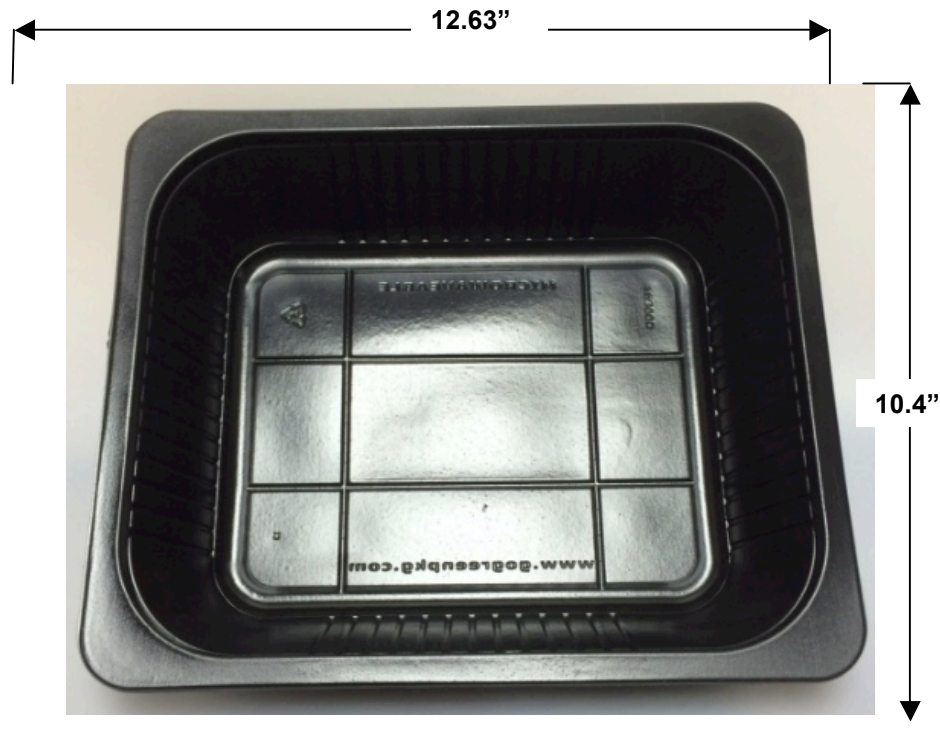

* These measurements give semi-quantitative estimates. Actual OTR of packaged contents is a function of volume of tray and amount of head space. Correlation of measured values with any given application must be determined by experience and actual shelf life tests.

DATE: August 1, 2010

REVISION: - C